AD Shortdipole 4D

Overview

Frequency Band UHF 860 - 960 MHz

Chip

Impinj Monza 4D

Antenna Dimensions 93 x 11 mm / 3.661 x 0.433 in

93 % 11 111111 / 3.001 % 0.433 111

International Standard ISO 18000-63, EPC Class 1 Gen 2

Industry Segments

Apparel Logistics

Industrial Applications

Applications

Returnable Transport Units (RTUs) Supply Chain Management Brand Protection

RoHS

EU Directive 2011/65/EC and Directive (EU) 2015/863

REACH

Regulation (EC) No 1907/2006



Excellent global performance on various materials

Our AD Shortdipole inlays and tags are designed and optimized for global retail, industry and supply chain applications, offering excellent performance in many situations, including on lower detuning materials like cardboard, plastics, corrugated boxes and RTIs.

AD Shortdipole inlays and tags are a size-optimized 100 mm / 4 inch form factor, making them suitable for use with a wide range of supply chain labels, and are available in dry, wet and label / sticker delivery formats. They are available with the Impinj Monza 4D chip that offers serial TID and memory feature with EPC 128-bit and 32-bit user memory.

Our inlays and tags are compliant with ISO 9001:2015 Quality Management and ISO 14001:2015 Environmental Management, which ensure a reliable and state-of-the-art product that meets a variety of application needs, enhancing RFID usage for difficult-to-tag materials.




Technical features

Chip	Impinj Monza 4D
EPC and User Memory	128-bit and 32-bit
TID Memory	96-bit / 48-bit unique serial number
Product Code	3001974/IL-602588
Delivery Format	Wet inlay
Die-Cut Dimension	97 x 15 mm / 3.819 x 0.591 in
Inlay Substrate	PET
Face Sheet	Clear PET
Standard Pitch	20 mm / 0.787 in
Web Width	100 mm / 4 in
Core Size	76 mm / 3 in
Quantity / Reel	20,000 pcs/reel 20,000 pcs/box
Operating Temperature	-40 °C to 85 °C / -40 °F to 185 °F

Orientation sensitivity

330 315 300 285 270 255 240 225 210 195 180 165 150

Read range

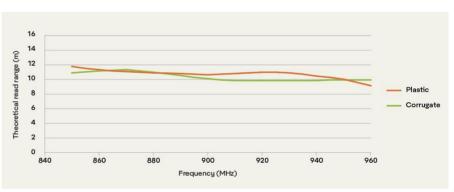

All graphs are indicative: performance in real life applications may vary.

Contact information

rfid.averydennison.com/contact 1-678-617-2359

Connect with us on:







© 2021 Avery Dennison Corp. All rights reserved. 170 Monarch Lane, Miamisburg, OH 45342, USA Third party trademarks and/or trade names used herein are the property of their respective owner(s). Some of the trademarks appear for identification purposes only.

 $\textbf{Warranty:} \ \mathsf{Please} \ \mathsf{refer} \ \mathsf{to} \ \mathsf{Avery} \ \mathsf{Dennison} \ \mathsf{standard} \ \mathsf{terms} \ \mathsf{and} \ \mathsf{conditions:} \\ \mathsf{rfid.averydennison.com/terms} \ \mathsf{and} \ \mathsf{conditions:} \\ \mathsf{and} \$

Care and handling: RFID inlays are sensitive to ESD. Observe standard industry practices relating to electronics / RFID to keep environmental impact and static charge to a minimum.



Applications: This product should be tested by the customer / user thoroughly under end use conditions to ensure the product meets the particular requirements. Avery Dennison does not represent that this product is fit for any particular purpose or use. Avery Dennison reserves the right to modify, change, supplement or discontinue product offerings at any time without notice. The information contained herein is believed to be reliable but Avery Dennison makes no representation concerning the accuracy or correctness of the data.